

Sand craters and dunes (10.0 points)

NASA's Spirit rover (**Fig. 1.(a)**) landed on Mars in 2004 to study its geology and potential presence of water. The landing site (**Fig. 1.(b)**) is surrounded by craters of various sizes and sand dunes. During exploration, the rover must avoid getting stuck in the sand dunes of Mars.

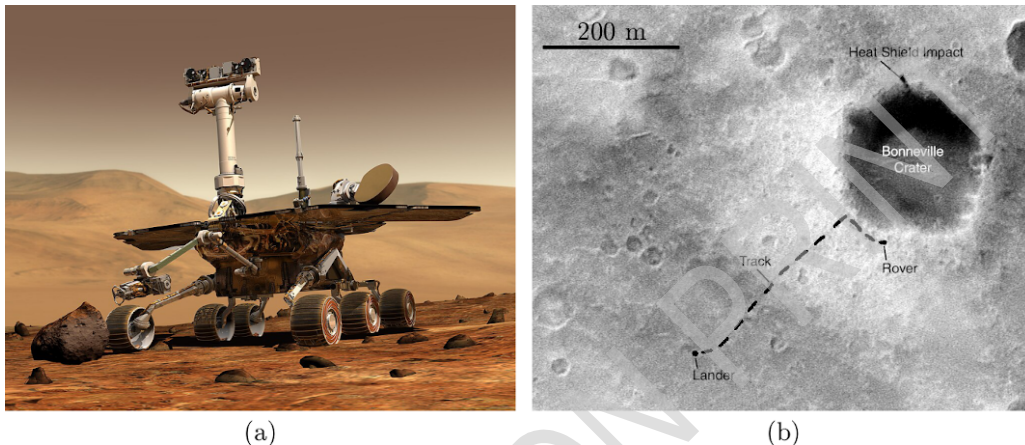


Fig. 1. (a) Artist's view of Spirit. (b) Landing site of the rover on Mars. The scale bar represents 200 m.

The problem has two independent parts A (crater formation) and B (sand trapping) that can be treated in any order. The list of equipment is given below and illustrated in **Fig. 2**.

- (a) Plastic box, needs to be emptied. The empty box will be used to collect the overflowing sand during experiments.
- (b) Bowl.
- (c) Bottle of sand.
- (d) 6 steel balls in a container. The balls have 4 different diameters. The three smallest ones are identical.
- (e) Tape measure.
- (f) Holding device consisting of a wooden tray with rubber feet (f1), a vertical rod (f4), clamping screw (f2) and horizontal rod (f3). The different elements must be assembled as shown in the photo (f).
- (g) Sieve, used to find the small ball if it gets lost in the sand.
- (h) Aluminium rail, 1 m long.
- (i) Brush to clean the rail and balls of sand if necessary.
- (j) Wooden track.
- (k) Chronometer.
- (l) Adhesive putty.
- (m) Funnel to help to put the sand back into the box at the end.
- (n) Spoon.
- (o) Ruler.

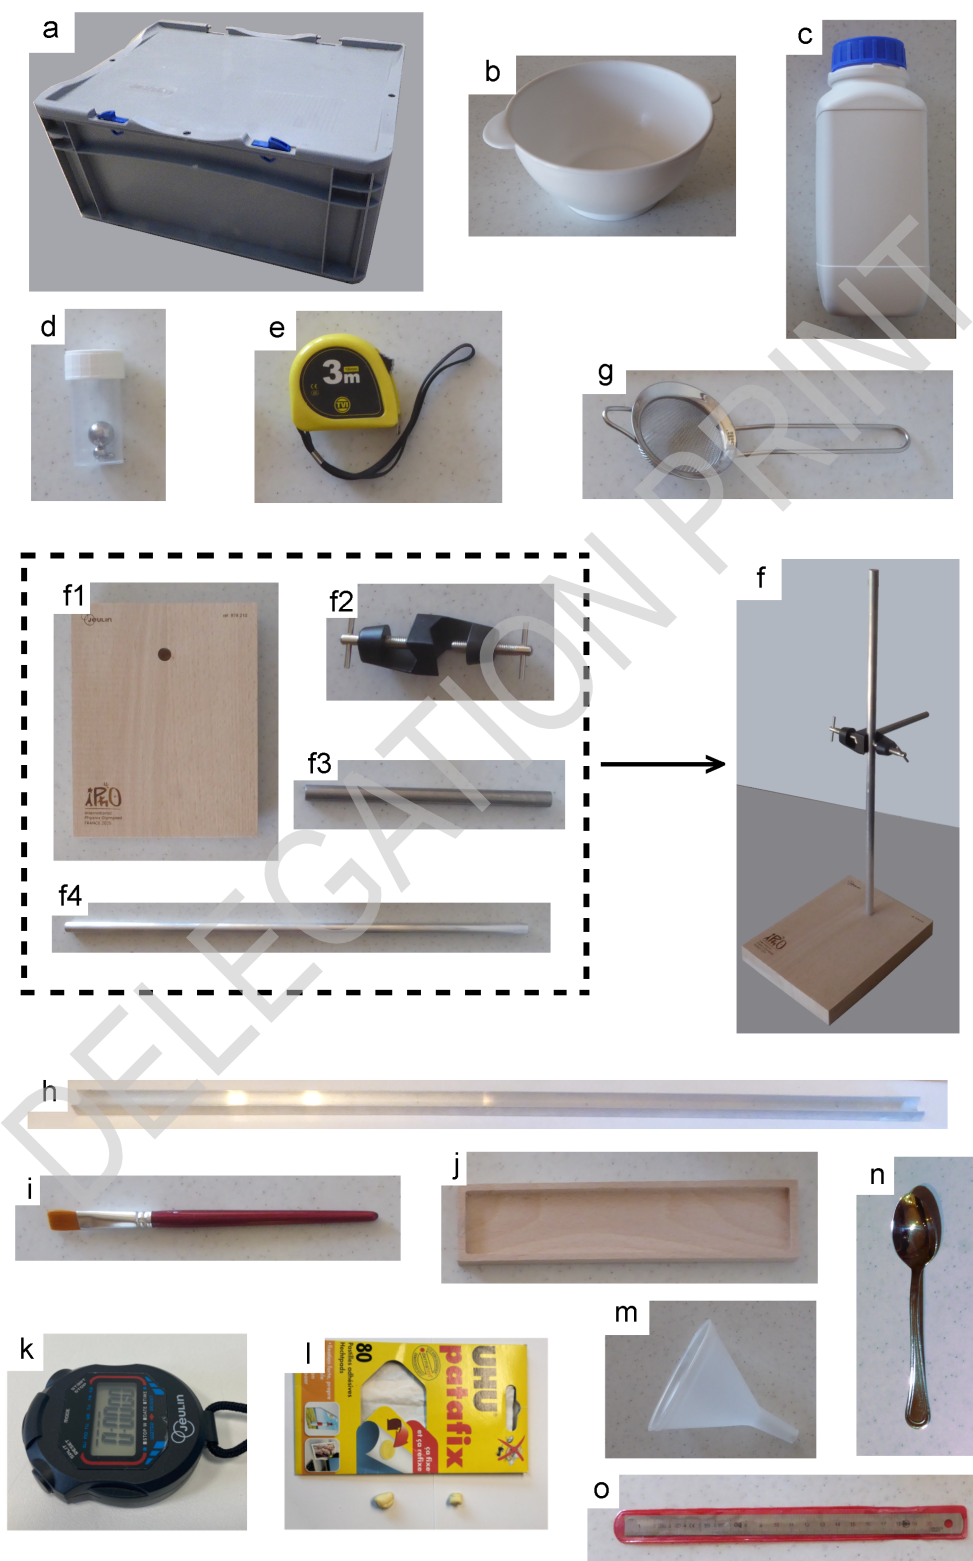


Fig. 2. Photographs of all equipment.

A. Impact craters

Craters on Mars, whose diameter D varies from about 10m to several hundreds of km, result from the impact of meteorites. Different models predict how D depends on the impact parameters: impactor diameter d , energy E (**Fig. 3**).

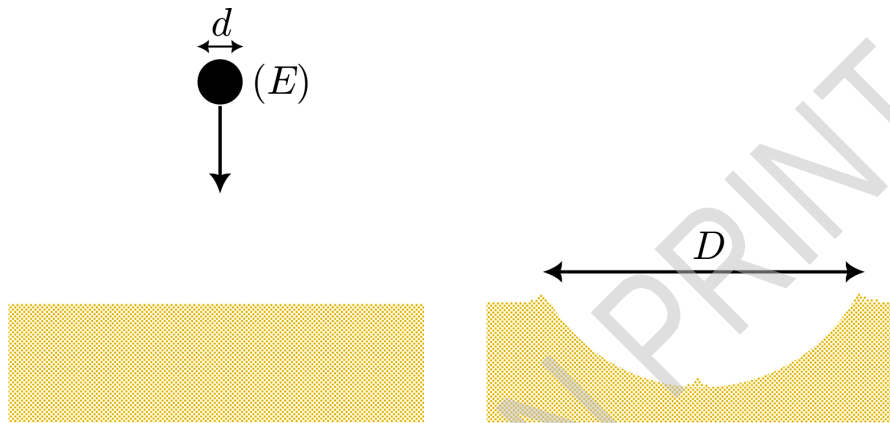


Fig. 3. Crater formation.

Model 1: D depends only on the impactor diameter d

$$D = c_1 d, \quad (1)$$

where c_1 is a dimensionless number independent of E and d .

Model 2: the meteorite energy E is converted through volumic processes during the impact. This model predicts that D is proportional to $E^{1/3}$

$$D = c_2 E^{1/3} \quad (2)$$

where c_2 is a parameter independent of E and d .

Model 3: E is used to eject material outside the crater. Under this assumption

$$D = c_3 E^{1/4} \quad (3)$$

where c_3 is a parameter independent of E and d .

Here, we perform experiments on crater formation at a centimeter scale to compare the three models. Steel balls of different diameters d and masses m , with a density $\rho_a = 7.8 \times 10^3 \text{ kg} \cdot \text{m}^{-3}$ (item **(d)** of the equipment list), act as the meteorites.

Ball #1	$d_1 = 2.0 \text{ mm}$	$m_1 = 0.033 \text{ g}$
Ball #2	$d_2 = 5.0 \text{ mm}$	$m_2 = 0.51 \text{ g}$
Ball #3	$d_3 = 9.0 \text{ mm}$	$m_3 = 3.0 \text{ g}$
Ball #4	$d_4 = 16.0 \text{ mm}$	$m_4 = 17 \text{ g}$

Experiment

The bowl (b) filled with sand (c) is placed inside the emptied plastic box (a) that will help collect the excess sand. The bowl is filled completely with sand and the surface is carefully leveled with the edge of the ruler (o). Avoid compacting the sand! To release the ball above the bowl, one can use the stand equipped with a rod and thumbscrew (f). The rod serves as a guide to release the ball directly above the bowl and also to measure the drop height h above the surface, which will be measured using the tape measure (e).

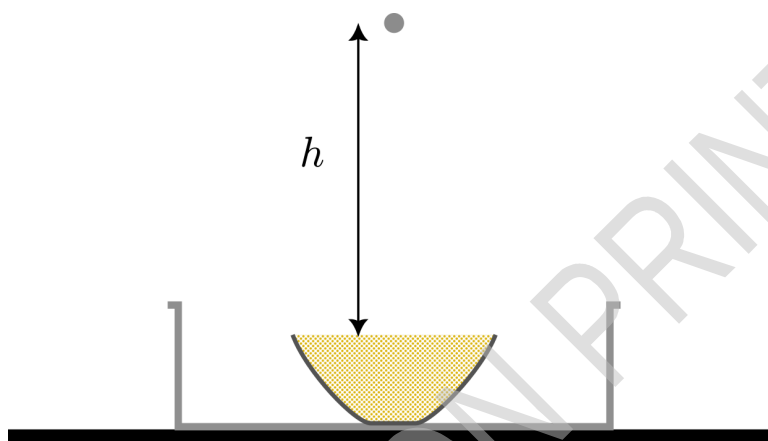


Fig. 4. Crater formation experimental setup.

Drop ball #3 from a height $h = 50\text{cm}$ and measure the diameter D of the crater formed. Repeat the experiment 5 times. After each impact, mix the sand with the spoon (n), and level it carefully with the edge of ruler (o). Avoid compacting the sand! If needed, use the sieve (g) to find the ball if it gets lost in the sand.

A.1 Present your results in a table and give D with its uncertainty.

0.6pt

SOLUTION:

D(mm)	23	24	22	25	25
-------	----	----	----	----	----

$$D = (23.8 \pm 1.2)\text{mm}$$

A1(1) : 2 measures of D between 22mm and 26mm	0.2pt
A1(2) : 3 more measures of D between 22mm and 26mm	0.2pt
A1(3) : mean value of D between 23mm and 25mm	0.1pt
A1(4) : uncertainty on D between 0.5 mm and 2mm	0.1pt

During the fall, the air drag force is

$$F = \frac{1}{8} \pi d^2 \rho_0 C_x v^2 \quad (4)$$

where v is the ball velocity, $\rho_0 \approx 1.2\text{kg}\cdot\text{m}^{-3}$ is the air density and C_x is a dimensionless coefficient of order

Experiment



Q2-5

English (Official)

unity.

The air drag force is negligible if the ball is dropped from a height less than the maximum drop height h_{\max} , defined as the height at which the air drag force remains less than 10 % of the weight throughout the fall.

A.2 Determine the theoretical expression for the maximum drop height h_{\max} . Calculate h_{\max} numerically for the four available balls. 0.5pt

SOLUTION:

If the friction with air is neglected, the maximum speed writes $v_{\max} = \sqrt{2gh}$ and the corresponding air friction is $F = \frac{1}{8}\pi d^2 \rho_0 C_x (2gh)$. If we want $F < mg/10$ then we obtain

$$h < 0.1 \frac{2}{3} \frac{\rho_a}{\rho_0} \frac{1}{C_x} d$$

A2(1) : $h_{\max} = 0.1 \frac{2}{3} \frac{\rho_a}{\rho_0} \frac{1}{C_x} d$ or any equivalent formula involving other variables.	0.4pt
A2(2) : 4 values for $h_{\max} = (0.9\text{m} ; 2\text{m} ; 4\text{m} ; 7\text{m})$	0.1pt

Investigate the relationship between D and E experimentally in order to compare the three power laws presented in the introduction. Find out if the exponent changes across the range of energies tested. To achieve this, take a series of measurements by dropping the balls from different heights. A wide range of energies must be covered. The balls can be dropped from heights of up to $h = 2\text{m}$ in order to reach high values of E while respecting the condition established in **A.2**. For each set of parameters, repeat the experiment only twice, and compute the mean value D .

A.3 Present your results in a table: mass of the ball m , drop height h , impact energy E , crater diameter D . 1.7pt

SOLUTION:

In order to cover a wide range of impact energies, we will release the small ball from a low height ($h=10\text{cm}$) and the big ball from height up to 2m (no need to drop the small ball from high). A key point is to reform the sand after each impact. If not, the sand becomes harder and the craters will be smaller. The energy $E=mgh$ varies from $3\text{E-}5\text{ J}$ (ball #1, $h=10\text{cm}$) up to 0.4J (ball #4, $h=2\text{m}$).

The expected values established by pre-IPhO experiments follow $D = 6.92(mh)^{0.25}$ where D is in mm, m is in g and h in cm.

A3(1) : $N > 5,5$ correct values of D ($ D - D_{\text{ref}} < 0.15 * D_{\text{ref}}$)	0.3pt
A3(2) : $N > 8,5$ correct values of D	0.3pt
A3(3) : $N > 11,5$ correct values of D	0.3pt
A3(4) : Correct calculation of $E=mgh$ ($ E - E_{\text{th}} < 0,1 * E_{\text{th}}$)	0.2pt
A3(5) : 2 decades for E (with 2 points/decade)	0.2pt
A3(6) : 3 decades for E (with 2 points/decade)	0.2pt
A3(7) : more than 3,5 decades for E	0.2pt


Experiment

Q2-6

English (Official)

- A.4** Plot your results on the graph paper of your choice (logarithmic or linear). On the graph representation, add lines corresponding to models 1, 2 and 3. State which of the three theoretical models best fits the experimental data. 1.2pt

SOLUTION:

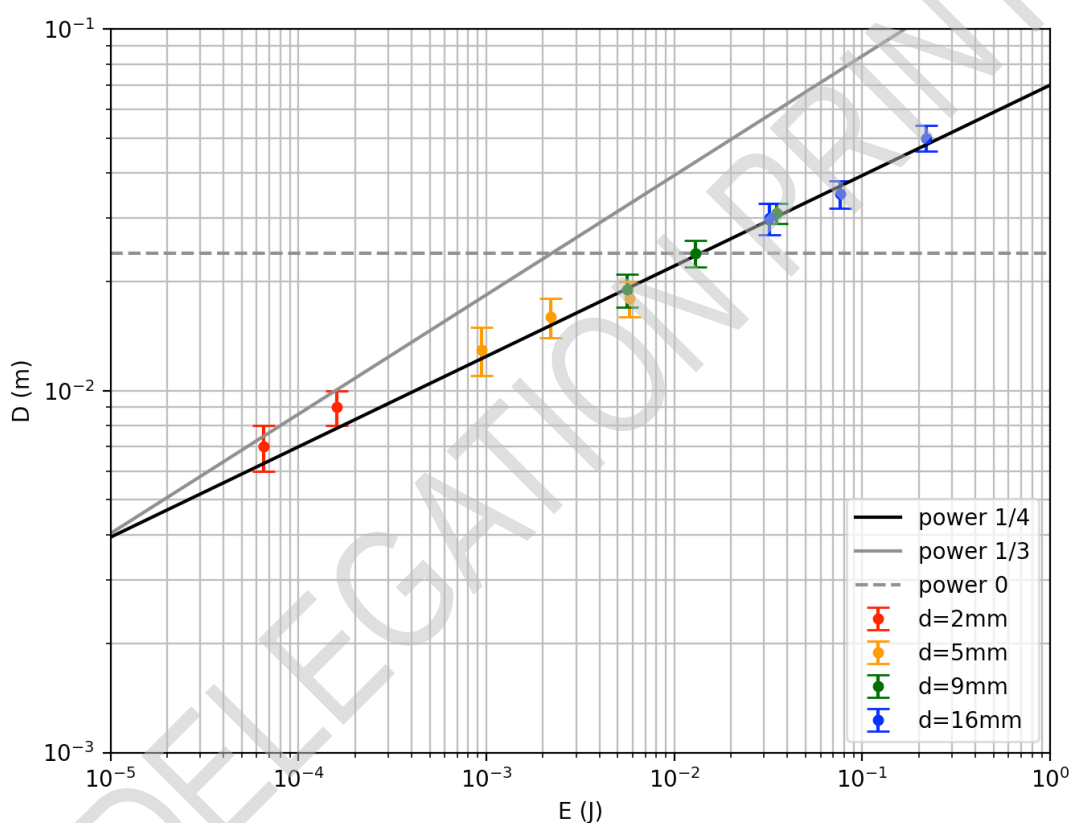

A4(1) : axes with label and units	0.1pt
A4(2) : theoretical straight lines of slope 1/3 and 1/4 (anywhere)	0.2pt
A4(3) : theoretical straight horizontal line (exponent 0)	0.1pt
A4(4) : $N > 4$ points on the graph	0.2pt
A4(5) : two points of the graph in coherence with the values in A3	0.2pt
A4(6) : points form a straight line	0.2pt
A4(7) : slope mesured and conclusion 1/4	0.2pt

B. Rolling and bogging in sand

Five years after landing, the rover Spirit bogs in the sands of a Martian dune for good. Rolling in sand is particularly delicate as the motion of grains dissipates a lot of energy. Here, we study the braking of a ball rolling in sand. The ball, initially at rest, is first accelerated on a rail inclined at an angle θ , then slowed down on a bed of sand.

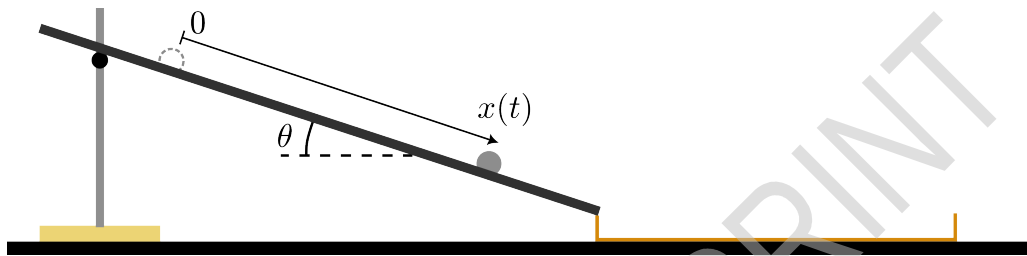


Fig. 5. Inclined rail (h) combined with the wooden track (j).

Ball motion along the rail

Ball #4 is released with no initial speed from an arbitrary point on the rail (h), chosen as the origin of the x -axis ($x = 0$) (Fig. 5). Let $x(t)$ denote the position of the ball along the rail. The moment of inertia of a ball of mass m and diameter d with respect to an axis passing through its center is given by $J = md^2/10$. The kinetic energy K of a ball moving at speed v while rotating at angular speed ω is

$$K = \frac{1}{2}mv^2 + \frac{1}{2}J\omega^2. \quad (5)$$

We assume that the ball rolls on the rail without slipping and neglect any energy dissipation.

B.1 Express the position x of the ball as a function of time t , angle θ and acceleration of gravity g . 0.4pt

SOLUTION:


Energy theorem (no dissipation) together with the kinematic relation $v = \omega R$ give a rapid answer. $dK/dt = -mgv\sin\theta$ leads to $x(t) = \frac{1}{1 + \frac{J}{md^2}} \cdot \frac{1}{2}g\sin\theta t^2$. Because of rolling, the ball is 5/7 slower than an hypothetical material point.

$\text{B1(1)} : x(t) = \frac{1}{1 + \frac{J}{md^2}} \cdot \frac{1}{2}g\sin\theta t^2 = \frac{5}{7} \cdot \frac{1}{2}g\sin\theta t^2$	0.4pt
--	-------

One end of the rail (h) rests on the edge of the wooden track (j), which is at this point empty of sand. The other end of the rail is supported by the stand (f) in such a way that it forms an angle of inclination $\theta = 5^\circ$ with the horizontal. Make sure to perform this adjustment carefully. The rail is secured in place (on both sides) using adhesive putty (l).

Use a chronometer (k) to measure the time t_{50} taken by the ball to travel a distance $l = 50\text{ cm}$ along the rail.

Experiment



Q2-8

English (Official)

- B.2** Take 5 measurements and present the result along with the order of magnitude of its statistical uncertainty. 0.7pt

SOLUTION:

t_{50} (s)	1.28	1.35	1.39	1.32	1.33
--------------	------	------	------	------	------

$$t_{50} = (1.33 \pm 0.04)s$$

B2(1) : 1 mesure of t_{50} between 1.2s and 1.4s	0.2pt
B2(2) : 4 more mesures of t_{50} between 1.2s and 1.4s	0.2pt
B2(3) : mean value of t_{50} between 1.25s and 1.35s	0.2pt
B2(4) : uncertainty of t_{50} between 0.02s and 0.30s	0.1pt

Measure t with the order of magnitude of its statistical uncertainty for at least 8 different values of ℓ .

- B.3** Present your results in a table. 0.8pt

SOLUTION:

Since we can anticipate the arrival of the ball at the bottom of the rail, the measurements are quite reproducible.

ℓ (cm)	10	20	30	40	50
t(s)	0.54 ± 0.03	0.87 ± 0.05	1.04 ± 0.05	1.16 ± 0.06	1.33 ± 0.04


ℓ (cm)	60	70	80	90	100
t(s)	1.45 ± 0.04	1.60 ± 0.07	1.71 ± 0.06	1.78 ± 0.05	1.83 ± 0.06

B3(1) : measures of t with uncertainty for 4 different values of ℓ ($ t - t_{th} < 0.1 \times t_{th}$)	0.3pt
B3(2) : 4 more measures of t	0.3pt
B3(3) : ℓ goes from 10cm up to 90cm	0.2pt

- B.4** Plot your results with error bars to confirm the law established at question B.1. Deduce an experimental estimate of the constant g with its uncertainty. 1pt

SOLUTION:


Experiment



Q2-9


English (Official)

We can plot ℓ as a function of t^2 or vice versa to obtain a straight line.

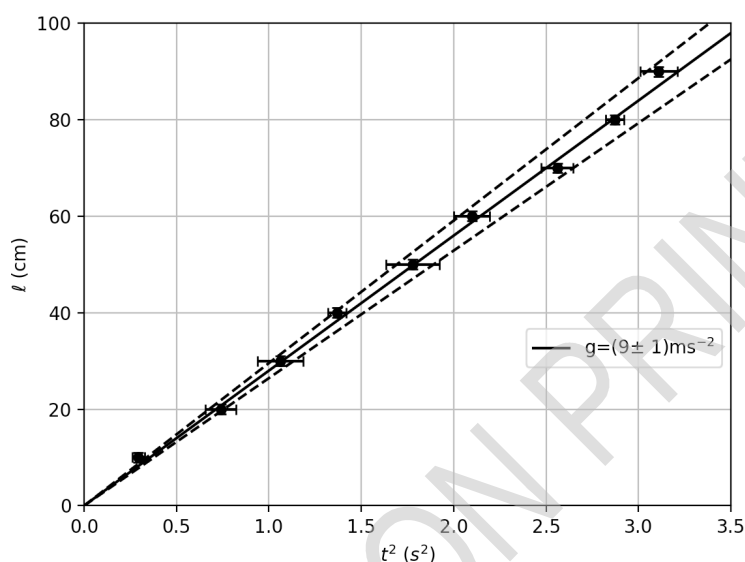

The slope is $\frac{5}{14}g \sin \theta$. We find $g = (9 \pm 1) \text{ ms}^{-2}$. This value is very sensitive to an error on the slope of the rail. An error of 1° (out of 5°) leads to an error of 2 ms^{-2} on the value of g .

One can also plot $\sqrt{\ell}$ as a function of t to detect a systematic shift error on t .

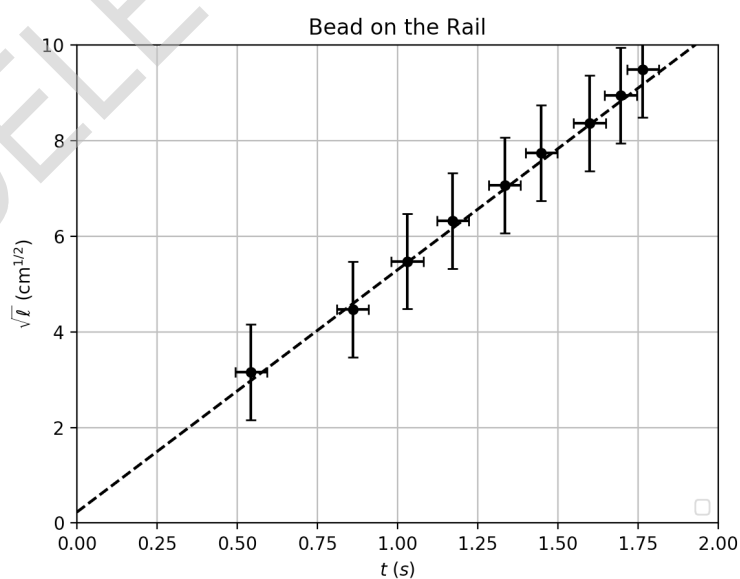

B4(1) : smart choice for the axes (ℓ , t^2) or anything that ends to a line	0.2pt
B4(2) : Presence of error bars for t	0.2pt
B4(3) : Adjustment made by a straight line.	0.2pt
B4(4) : value of g between 6ms^{-2} and 14ms^{-2}	0.2pt
B4(5) : values of g between 8ms^{-2} and 12ms^{-2}	0.1pt
B4(6) : Uncertainty on g of the order of 1ms^{-2}	0.1pt

Motion of the ball in sand

We note ℓ the distance travelled by the ball on the rail. On the sand, the ball comes to a stop after travelling a distance L as defined in **Fig. 6**.

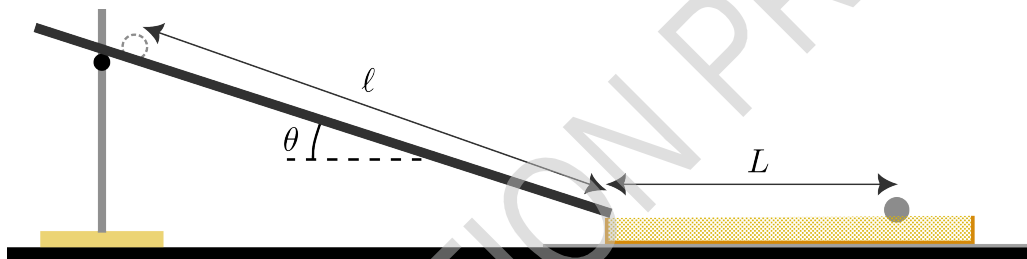


Fig. 6. Acceleration over a distance ℓ and stopping over a distance L .

It is thus slowed down by a drag force T which may have two possible origins:

- **Model #1 (solid friction):** as between two solids in relative motion, the sand exerts on the ball a constant drag force $T = -\mu_{\text{eff}}mg$, where μ_{eff} is the effective drag coefficient of the ball-sand contact and m is the mass of the ball.
- **Model #2 (fluid drag):** the drag force depends linearly on the ball velocity, $T = -kv$ where k is a constant and v the norm of the velocity.

The goal here is to determine which proposition best describes the observed braking behavior.

When moving in sand, the ball is modelled as a point mass. Given the small value of the slope of the rail, we neglect any energy loss in the transition between the rail and the sand track. Establish the theoretical law linking L to ℓ in each of the two situations (solid friction or fluid drag). The two suggestions lead to a power law of the form $L \sim \ell^\alpha$ in which the exponent α takes two different values.

B.5 For model 1 and model 2, give the relationship between L and ℓ and the value of α . 0.6pt


SOLUTION:

Energy considerations for model #1 are straightforward : $mgh = \mu_{\text{eff}}mgL$ which lead to

$$L = (\sin\theta / \mu_{\text{eff}}) \ell \text{ and then } \alpha = 1.$$

Some more calculus are needed for suggestion #2 : we must solve the differential equation for $v(t)$ and we find $v(t) = v_0 \exp(-t/\tau)$ where $\tau = m/k$ and $v_0 = \frac{5}{7} \sqrt{2g\ell \sin\theta}$. An integration gives $x(t) = v_0\tau(1 - \exp(-t/\tau))$ which tends to

Experiment



Q2-11

English (Official)

$$L = \frac{5}{7} \frac{m}{k} \sqrt{2g \sin \theta} \sqrt{\ell} \text{ and } \alpha = 1/2.$$

B5(1) : model #1: $L = (\sin \theta / \mu_{\text{eff}}) \ell$	0.1pt
B5(2) : model #1: $\alpha = 1$	0.1pt
B5(3) : model #2: $L = \frac{5}{7} \frac{m}{k} \sqrt{2g \sin \theta} \sqrt{\ell}$. The answer $L = \frac{m}{k} \sqrt{2g \sin \theta} \sqrt{\ell}$ will also be accepted.	0.3pt
B5(4) : model #2: $\alpha = 1/2$	0.1pt

Place the wooden track (j) on a sheet of paper. Fill the track with sand and prepare a uniform layer by carefully scraping the surface with the ruler. Avoid compacting the sand! Adjust again carefully the angle of the rail to $\theta = 5^\circ$. Release ball #4 ($d_4 = 16.0 \text{ mm}$) on the inclined rail so that the distance travelled on the rail is $l = 50 \text{ cm}$.

Before each run, stir the sand, refill the track and scrape the surface again. Clean the rail and the ball from sand by using the brush (i). At the end of the experiment, use the sheet of paper as a funnel to put the sand in excess back in the bottle.

- B.6** Measure the distance L_{50} travelled in the sand until the ball comes to a stop. Perform several measurements (at least 5) to determine L_{50} along with its unit and uncertainty. 0.8pt

SOLUTION:

If the layer is not carefully redone after each run, the sand will get harder and the ball will run out of the track.

$L_{50} \text{ (cm)}$	7.0	6.7	5.8	6.7	6.1
-----------------------	-----	-----	-----	-----	-----


$$L_{50} = (6.4 \pm 0.5) \text{ cm}$$

B6(1) : 3 measures of L_{50} between 5,5cm and 7,5cm.	0.4pt
B6(2) : 2 more measures between 5,5cm and 7,5cm	0.2pt
B6(3) : mean value of L_{50} between 5.8cm and 7.2cm	0.1pt
B6(4) : uncertainty on L_{50} between 0.2cm and 1.0cm	0.1pt

- B.7** After several measurements for at least 8 values of ℓ (keeping $\theta = 5^\circ$), plot L with its error bars as a function of ℓ and conclude which model best describes the drag force T . 1.5pt

SOLUTION:

Experiment

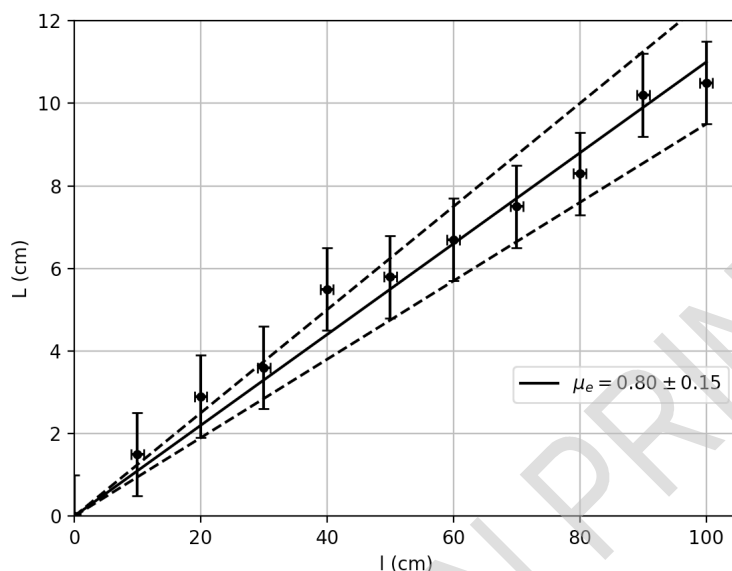

The points are compatible with a straight line and a "solid-like" friction model (suggestion #1)

B7(1) : 4 measures of L for different ℓ	0.3pt
B7(2) : 4 more measures of L	0.2pt
B7(3) : ℓ varies (at least) from 10cm up to 90cm	0.1pt
B7(4) : graph L as a function of ℓ or $\log(L)$ as a function of $\log(\ell)$, axes, values and units	0.1pt
B7(5) : more than 2,5 points on the graph	0.1pt
B7(6) : more than 5,5 points on the graph	0.2pt
B7(7) : error bars between $\pm 0.5\text{cm}$ and $\pm 1\text{cm}$ for L	0.1pt
B7(8) : a linear law is plotted, and compatible with the points.	0.2pt
B7(9) : conclusion $\alpha = 1$ and "solid-like" friction in sand.	0.2pt

B.8 Based on the chosen model, specify the value of the coefficient μ_{eff} or k that characterizes the force T . 0.2pt

SOLUTION:

The relation is $L = (\sin \theta / \mu_{\text{eff}}) \ell$

$$\mu_{\text{eff}} = 0.8 \pm 0.1$$

B8(1) : μ_{eff} between 0.6 and 1.0	0.2pt
--	-------